


6 meter Band Plan for Northern California 50 - 54 MHz

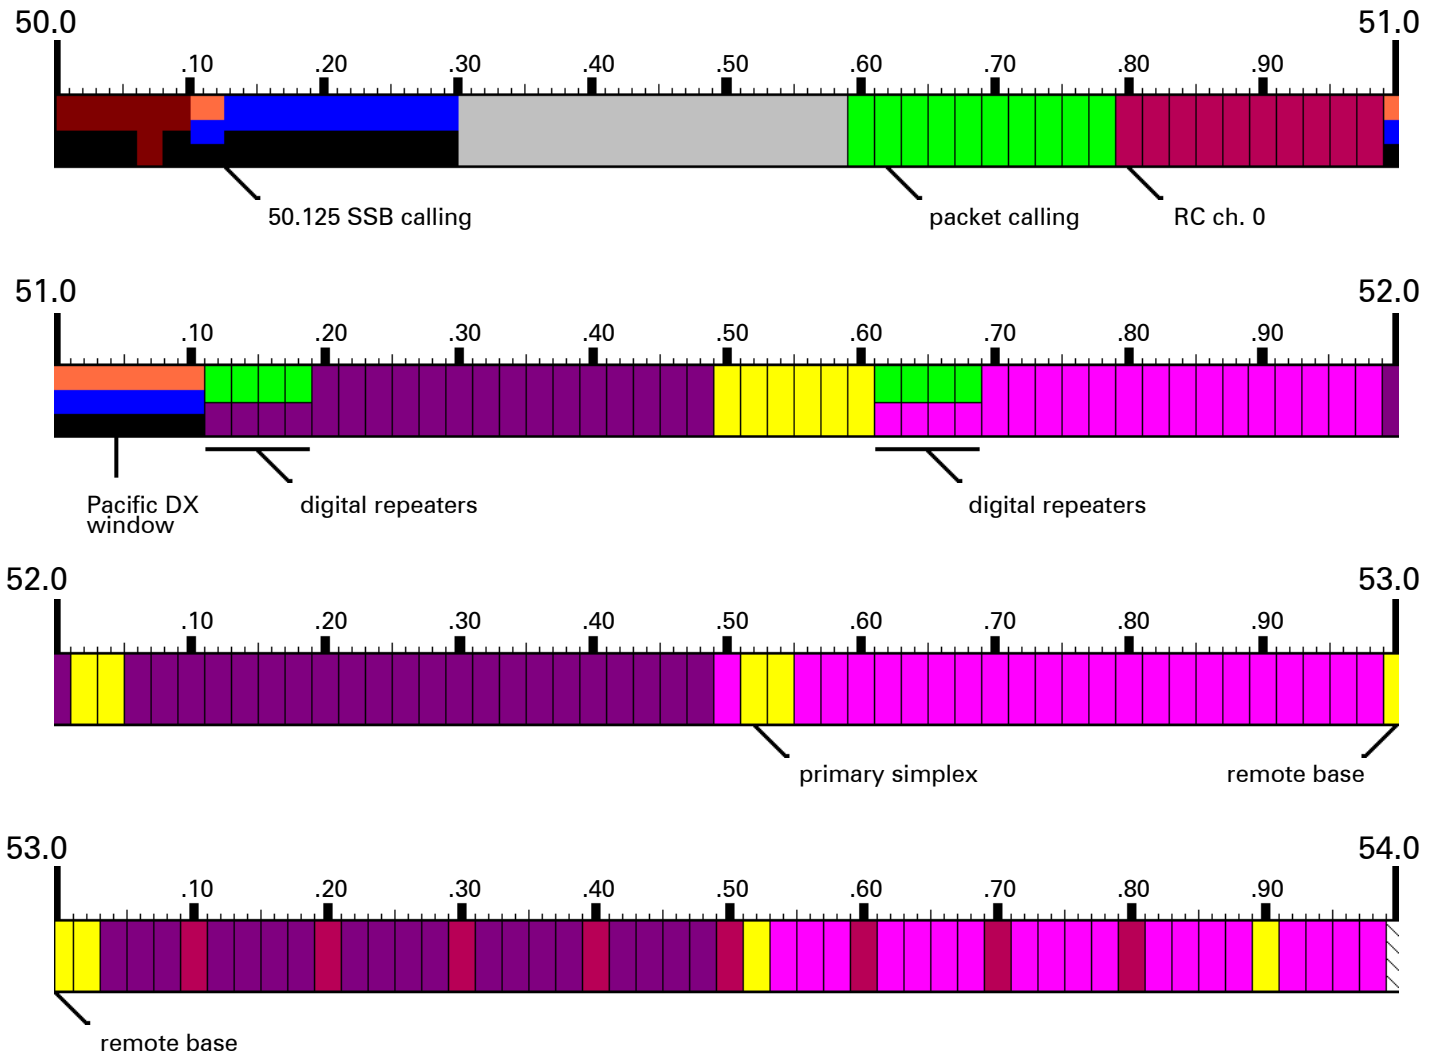

	All mode		FM Simplex
	Beacons		Remote Control
	CW		Repeater Input
	Digital		Repeater Output
	DX Window		SSB

20 kHz channel spacing

For general Amateur Radio, see ARRL (www.arrl.org)

For remote control, see AMA (www.modelaircraft.org)

For repeaters, see NARCC (www.narcc.org)

For satellites, see AMSAT (www.amsat.org)

10 Digital channels

50.60
 50.62 calling
 50.64
 50.66
 50.68
 50.70
 50.72
 50.74
 50.76
 50.78

14 FM Simplex channels

51.50
 51.52
 51.54
 51.56
 51.58
 51.60
 52.02
 52.04
 52.52 primary simplex
 52.54
 53.00 remote base
 53.02
 53.52
 53.90

18 Remote Control channels

50.80 ch 0
 50.82 ch 1
 50.84 ch 2
 50.86 ch 3
 50.88 ch 4
 50.90 ch 5
 50.92 ch 6
 50.94 ch 7
 50.96 ch 8
 50.98 ch 9
 53.10
 53.20
 53.30
 53.40
 53.50
 53.60
 53.70
 53.80

4 Digital Repeater Pair

Output	Input
51.12	51.62
51.14	51.64
51.16	51.66
51.18	51.68

54 Analog Repeater Pair

Output	Input	Output	Input
51.72	51.22	52.88	52.38
51.74	51.24	52.90	52.40
51.76	51.26	52.92	52.42
51.78	51.28	52.94	52.44
51.80	51.30		
51.82	51.32	52.98	52.48
51.84	51.34		
51.86	51.36	53.54	53.04
51.88	51.38	53.56	53.06
51.90	51.40	53.58	53.08
51.92	51.42		
51.94	51.44	53.62	53.12
51.96	51.46	53.64	53.14
51.98	51.48	53.66	53.16
		53.68	53.18
52.56	52.06		
52.58	52.08	53.72	53.22
52.60	52.10	53.74	53.24
52.62	52.12	53.76	53.26
52.64	52.14	53.78	53.28
52.66	52.16		
52.68	52.18	53.82	53.32
52.70	52.20 *	53.84	53.34
52.72	52.22	53.86	53.36
52.74	52.24	53.88	53.38
52.76	52.26		
52.78	52.28	53.92	53.42
52.80	52.30	53.94	53.44
52.82	52.32	53.96	53.46
52.84	52.34	53.98	53.48
52.86	52.36		

* test pair in the ARRL band plan